


# APPLICATION OF GEOSPATIAL TECHNIQUE'S IN LAND USE AND LAND COVER MAPPING

## 1.1 Land Cover Mapping

Land cover refers how much of a region of the earth surface is covered by forests, wetlands, impervious surfaces, agriculture, water body etc. Water body includes wetlands or open water. Whereas land use shows how people use the land – whether for social-economic development, conservation, or mixed uses.


Land cover can be identified and mapped using satellite remote sensing data in a short time over a large area at a time. These maps help planners and managers to understand about the current landscape which helps them to evaluate past management decisions as well as gain insight into the possible effects of their current decisions before they are implemented. As an example, coastal managers use land cover data and maps to understand the impacts of natural phenomena and human use of the landscape. Maps can help managers to assess urban growth, model water quality issues, predict and assess impacts from floods and storm surges, track wetland losses and potential impacts from sea level rise, prioritize areas for conservation efforts, and compare land cover changes with effects in the environment or to connections in socio-economic changes such as increasing population.

A simple land cover land use map can be prepared by supervised or unsupervised techniques or combination of both. The output map depends on the spectral, spatial and radiometric resolution of the image data set. The basic need of an image classification is a general knowledge about the landscape of the study area, post classification field verification and accuracy assessment. The steps to generate land use land cover map are shown through flowchart in Fig 1.1.

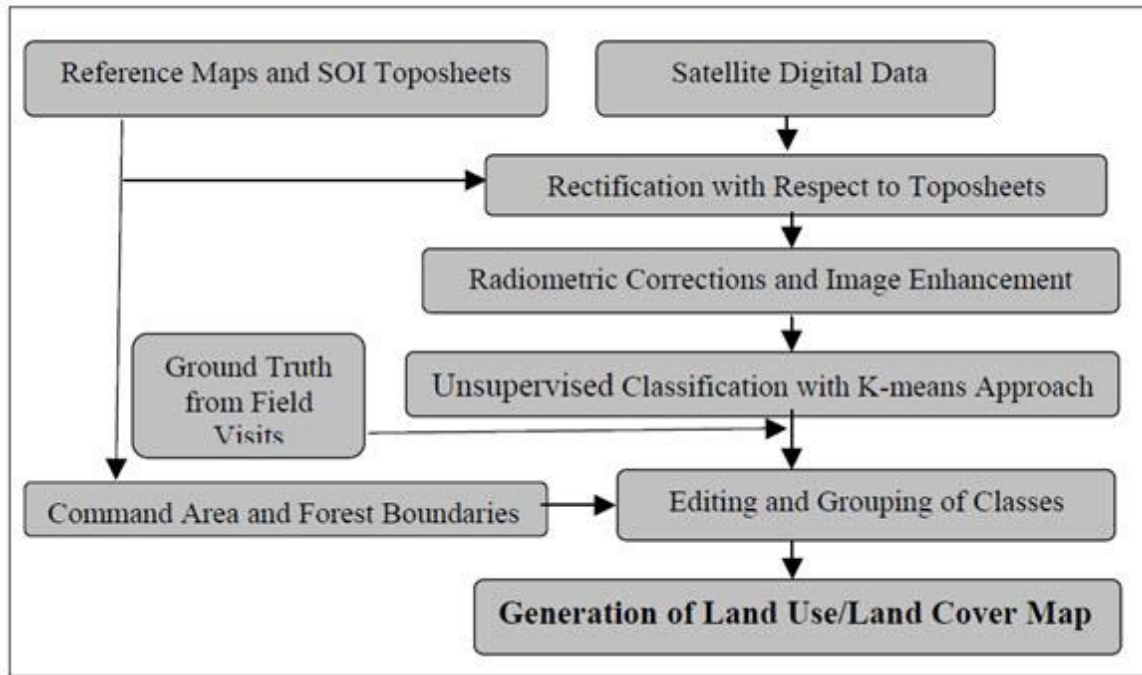

**Fig. 1.1. Flowchart generation of land use land cover map.**

The study has been carried out for irrigation planning using remote sensing and GIS for wheat crop grown in Tarafeni South Main Canal command (TSMC), (Gontia, 2005). A land use land cover map classification generated for TSMC is shown in Fig 30.2. The corresponding error matrix and accuracy assessment carried out are given in the Table 1.1 and Table 1.2 respectively.

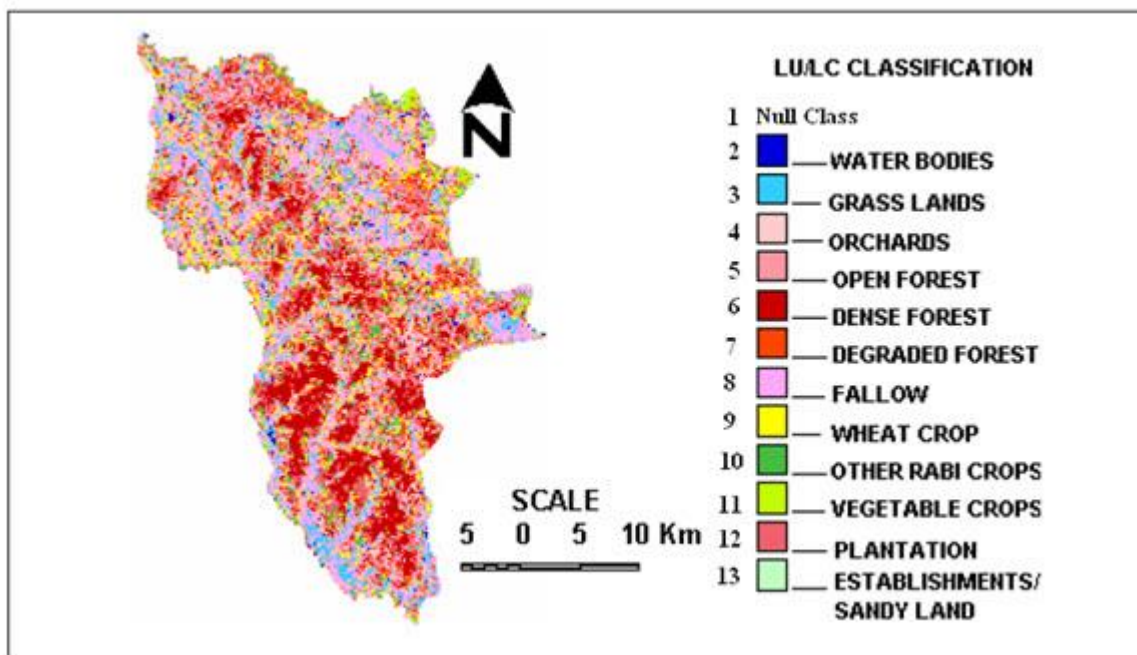

**Fig. 1.2. Land use land cover classification map of an area.**

**Table 1.1 Error matrix of the classified image**

Classified Data	Reference Data													Total
	1	2	3	4	5	6	7	8	9	10	11	12	13	
1	166	0	0	0	0	0	0	1	0	0	1	1	0	169
2	0	19	8	0	0	0	0	0	0	0	1	0	0	28
3	0	5	21	0	1	0	0	2	3	0	0	0	0	32
4	0	0	0	12	1	2	0	0	0	0	0	0	1	16
5	0	0	1	2	16	0	1	1	2	0	0	0	1	24
6	0	0	0	1	0	35	2	0	0	1	0	0	0	39
7	0	0	0	3	2	2	13	0	0	1	1	0	2	24
8	0	0	0	0	0	0	1	17	3	1	0	0	1	23
9	0	0	3	0	1	1	0	1	51	2	2	1	1	63
10	0	0	1	0	0	0	0	1	2	36	3	1	0	44
11	0	0	1	0	0	0	0	1	1	1	19	3	0	26
12	0	0	1	0	0	2	1	0	1	1	2	18	0	26
13	0	1	0	2	1	0	4	1	2	0	3	0	8	22
Total	166	25	36	20	22	42	22	25	65	43	32	24	14	536

**Table 1.2 Accuracy statistics of land use land cover classification**

Class Name	Producer's Accuracy, %	User's Accuracy, %
Null	100.00	98.22
Water Bodies	76.00	67.86
Grass Lands	58.33	65.63
Orchards	60.00	75.00
Open Forest	72.73	66.67
Dense Forest	83.33	89.74
Degraded Forest	59.09	54.17
Plantation	68.00	73.91
Fallow	78.46	80.95
Wheat Crop	83.72	81.82
Other Rabi Crops	59.38	73.08
Vegetables	75.00	69.23
Establishments/Sandy Lands	57.14	36.36

Overall accuracy = 80.41 per cent and Overall Kappa statistics ( $\hat{k}$ ) = 0.7734.

## 1.2 Land use/Land Cover Change Detection

Land use and land cover is an important component in understanding the interactions of the human activities with the environment and thus it is necessary to simulate changes. Land use and land cover are dynamic in nature. Land use and land cover (LULC) change is a major issue of global environment change. Changes may be natural or manmade for land use land cover modification. Land degradation also takes place due to increased human activity without proper management practices. Changes in landuse can be due to urban expansion and the loss of agriculture land, changes in river regimes, the effects of shifting cultivation, the spread of erosion and desertification and so on. This, therefore, requires not only the identification of features but also the comparison of subsequent data in order to recognize when valid change has taken place. The land use change has a direct bearing on the hydrologic cycle. Various hydrologic processes such as interception, infiltration, evapotranspiration, soil moisture, runoff and ground water recharge are influenced by landuse landcover characteristics of a catchment. Application of remotely sensed data made possible to study the changes in land cover in less time, at low cost and with better accuracy in association with Geographical Information System (GIS) that provide suitable platform for data analysis, update and retrieval helps in monitoring, mapping and management of natural resources.

A number of techniques for accomplishing change detection using satellite imagery can be used, which are broadly grouped into two general types: (1) those based on spectral classification of the input data such as post-classification comparison and direct two-date classification; and (2) those based on radiometric change between different acquisition dates, including (a) image algebra methods such as band differencing, ratioing, and vegetation indices; (b) regression analysis; (c) principal component analysis; and (d) change-vector analysis (CVA).

Chen. et al. (2003) stated the methodology of change-vector analysis (CVA) which is shown through Fig. 1.3. The output image generated using CVA method is given in Fig 1.4.



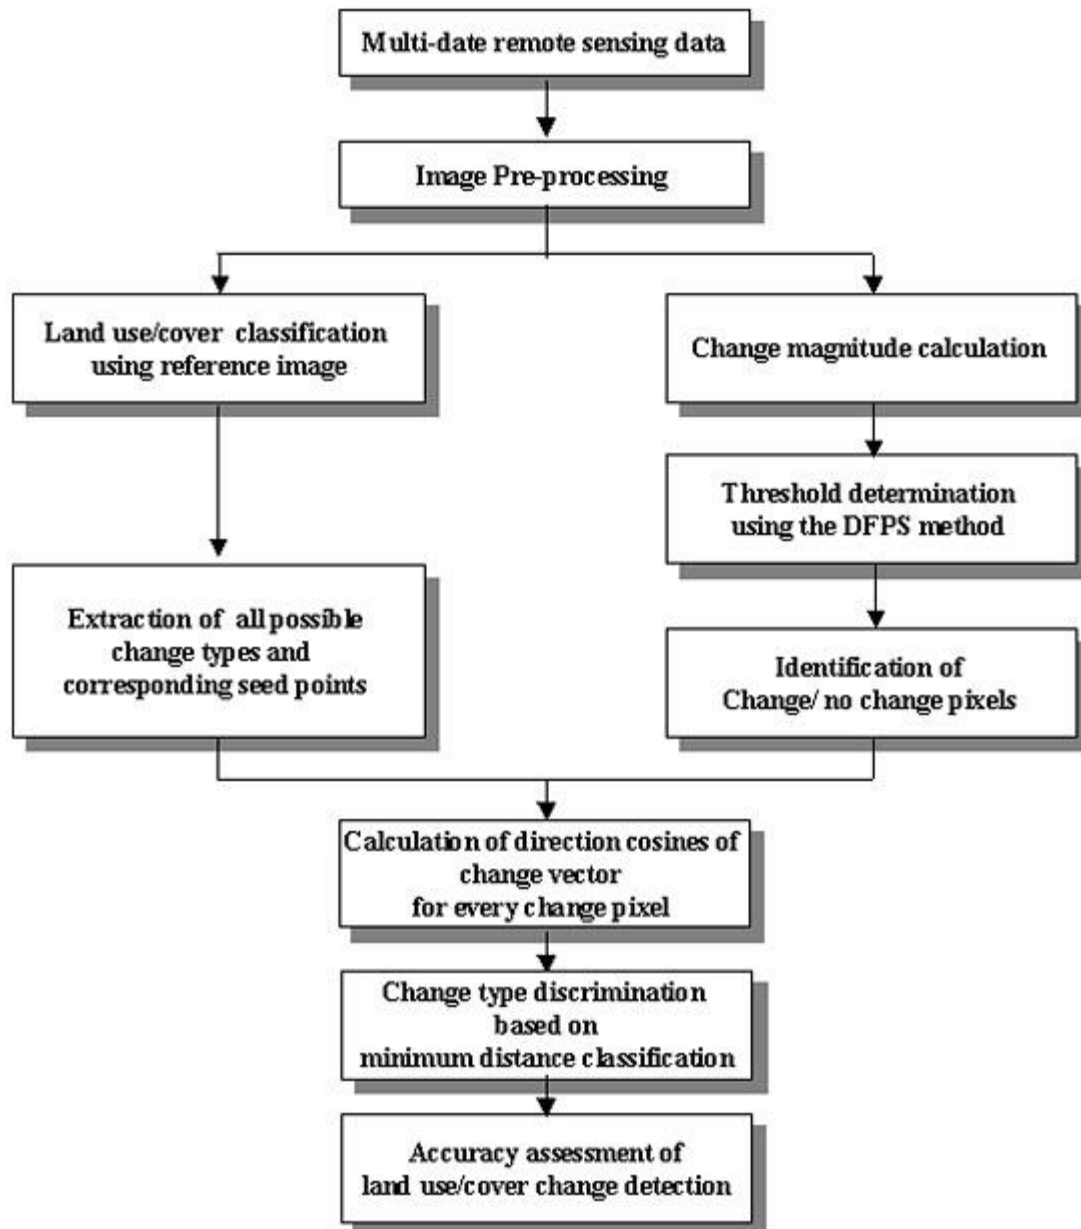


Fig. 1.3. Flowchart of land-use/land-cover change detection based on improved change vector analysis. (Source: Chen, et al., 2003)

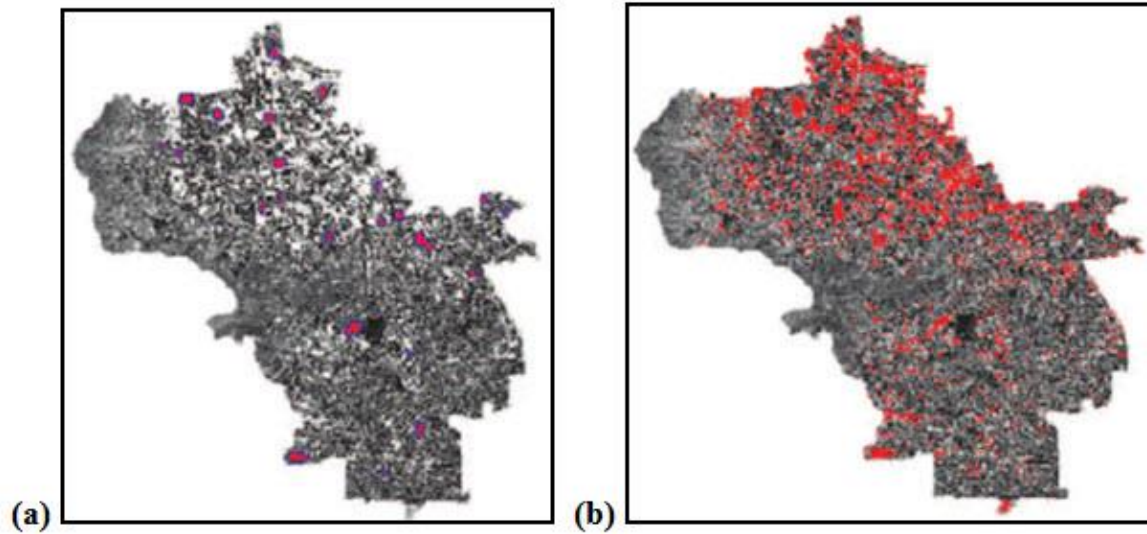

**Fig. 1.4.** The selected change sample areas and results of change/no-change detection. (a) Typical change sample areas (red) with outer no-change buffer boundary (blue). (b) Change pixels detected by the improved CVA method. (Source: Chen, et al., 2003)

Another study on land use land cover change detection has been carried out for Tarafeni catchment of West Bengal by Jena (2002). The output change detection map and statistics of obtained through analysis of satellite image of Tarafeni catchment are given in Fig. 1.5 and Table 1.3.

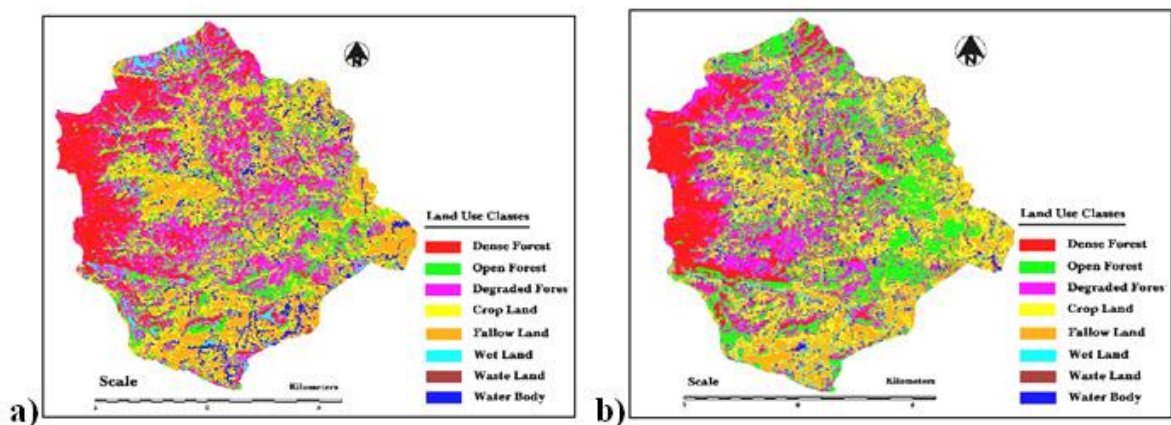

**Fig. 1.5.** Land cover land use map of Tarafeni catchment of year (a)1989, (b)2000. (Image Source: Jena, 2002)

**Table 1.3 Land use land cover statistics of Tarafeni catchment**

Land use land cover Type	Area (ha.)	
	Year 1989	Year 2000
Dense forest	2715.0	1874.9
Open forest	2109.6	3046.6
Degraded forest	3337.0	2932.7
Cropland	1961.6	2207.0
Fallow land	4029.8	3815.4
Wet land	605.07	639.40
Waste land	0.00	367.9
Water bodies	1048.1	922.13

(Source: Jena, 2002)

From the Table 1.3 it can be observed that in 11 years open forest, crop land, wet land and waste land have increased, whereas dense forest, degraded forest, fallow land, water bodies have decreased. Such information can be used for planning purpose.

### References

- ✓ Chen J., G. P., H. C., P. R., S. P., April 2003, Land-Use/Land-Cover Change Detection Using Improved Change-Vector Analysis, Photogrammetric Engineering & Remote Sensing.
- ✓ Gontia, N. K., 2005, Crop Water Stress Indices and Evapotranspiration Estimation for Irrigation Scheduling and Yield Modelling of Wheat Crop Using Remote Sensing and GIS, PhD thesis submitted to IIT Kharagpur.
- ✓ Jena, S. K., 2002, Development and evaluation of hydrological models for agricultural watersheds using remote sensing and GIS, PhD thesis submitted to IIT Kharagpur.
- ✓ [www.ijest.info/docs/IJEST10-02-12-058.pdf](http://www.ijest.info/docs/IJEST10-02-12-058.pdf)